

## RIGIWALL® 4353

*Durable Class 1-A sheet for interior wallcovering*

**Rated Class 1-A to 0.125 in. (3.2 mm). Resists chemicals, cleaners.**

**Widest range of colors, textures.**



RIGIWALL® 4353 combines exceptional durability, the widest range of color and texture options and long service life in a wallcovering material for schools, hospitals, office buildings, hotels and other high traffic environments.

Available in thicknesses from 0.060 to 0.125 in. (1.5 to 3.2 mm), this proprietary thermoplastic alloy meets Class 1-A flammability requirements, and carries a UL 723 listing. Its high impact strength also resists damage from shopping and luggage carts, wheeled equipment, gurneys and wheelchairs.

RIGIWALL 4353 also helps maintain clean, attractive aesthetics even in damage prone areas. Its integral colors mask marring and scratches that visibly damage painted, laminated and printed materials. It also withstands sanitizing chemicals and strong cleaners needed for removing graffiti and scuff marks.

The material can be adhered directly to interior walls or pre-laminated to substrates like MDF to create rigid composite panels. It can also be thermoformed, post-formed and machined to make guards and other wall system components in matching and complementary colors.

### Advantages

- Meets Class 1-A to 0.125 in. (3.2 mm)
- Durable, high impact resistance
- Abrasion, stain and chemical resistant
- Easy to clean, maintain
- Uniform surface appearance
- Widest range of colors

### Applications

- Protective wallcovering
- Pre-laminated panels, partitions
- Crash rails, corner guards
- Profile moldings and trim
- Kick plates, base moldings
  - Health care facilities
  - Long term care facilities
  - Government, commercial buildings
  - Hotels, elevators
  - Schools, gyms, spas
  - Retail stores, supermarkets
  - Detention facilities
  - Airports

### Configurations

- Sheet sizes
  - Lengths to 120 in. (3,048 mm)
  - Widths to 60 in. (1,524 mm)
  - Gauges from 0.060 to 0.125 in. (1.5 to 3.2 mm)
  - Custom sizes and rolls on request
- Colors, textures
  - Full range of colors
  - Industry's widest range of textures
  - 500 lb standard minimum

## PROPERTIES, RATINGS

PROPERTY	TEST METHOD	RIGIWALL® 4353	
Specific Gravity	ASTM D792	1.44	
Tensile Strength	ASTM D638	5,600 psi	38.6 MPa
Flexural Strength	ASTM D790	8,400 psi	58 MPa
Flexural Modulus	ASTM D790	390,000 psi	2,691 MPa
Izod Impact (notched) @ 73°F (23°C)	ASTM D256	8.7 ft-lb/in.	464.6 J/m
Gardner Impact @ 73°F (23°C) Sheet thickness 0.040" (1.06 mm)	ASTM D5420-04	130 in-lb	14.7 J
Hardness Rockwell R	ASTM D785	103	


### Thermal

Heat Deflection - annealed @ 264 psi (1.82 MPa)	ASTM D648	166°F	74.5°C
<b>Flammability @ max. thickness (UL File # R10633)</b>	<b>ASTM E84</b>	<b>Flame Spread</b>	<b>Smoke Developed</b>
@ 0.125 in. max.	ASTM E84	15	450
<b>Class 1-A requirements</b>	ASTM E84	<25	<450

## RELATED PRODUCTS

### RIGIWALL® Class 1-A Wallcovering Sheet Products

RIGIWALL® Grade	Description	Class 1-A max. thickness
4323	Interior, impact resistant	0.060 in. (1.5 mm)
4333	Interior, impact resistant	0.040 in. (1.02 mm)
4333W	UV and impact resistant	0.040 in. (1.02 mm)
4353	Interior, impact resistant	0.125 in. (3.0 mm)
4363	Interior, PVC-free	0.060 in. (1.5 mm)
<b>3D Membrane Pressing and Laminating Grade</b>		
Boltaron 4065MP	Interior, impact resistant	Flammability: UL 94 V-0

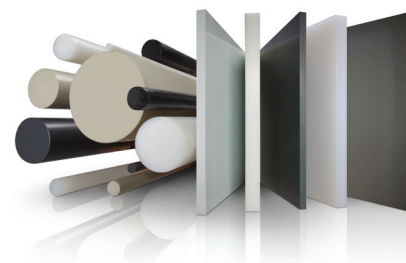

SIMONA offers the widest product range of PVC sheet and rod – FM 4910 rated sheet – chemical resistant materials from PVC, PP and PE to fluoropolymers – orthotics and prosthetics sheet – Boltaron® aircraft and specialty sheet – plus proven products for boat building, outdoor furniture and many other industries.

#### DISCLAIMER AND LIMITATION OF WARRANTY:

All information contained herein is believed by SIMONA AMERICA Inc. to be reliable. Typical properties are based on laboratory tests conducted on material samples in accordance with standard test methodology. SIMONA AMERICA Inc. makes no express or implied warranty that its products will perform in accordance with the data in all conditions and circumstances. To determine suitability for use, users must test applications under actual operating conditions. As a result, ALL EXPRESS OR IMPLIED WARRANTIES IN CONNECTION WITH SIMONA AMERICA INC. and BOLTARON PRODUCTS INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY DISCLAIMED.

#### Boltaron Inc.

1 General Street  
Newcomerstown, OH 43832  
Phone 1 740 498 5900  
(US) 1 800 342 7444  
Fax 1 740 498 5448  
info@boltaron.com  
www.boltaron.com